


Category 6A 10Gain[®] + Offer



- Cable without a continuous shield to offer margin over Alien Crosstalk (AXT) performance requirements in ANSI/TIA-568-2.D.
- Uniquely designed Isolation Wrap contains discontinuous sections of metallized material, held in place by a polymeric layer
- Technology leader in the market
- Produced in a Zero Waste to Landfill facility in Kansas
- Contribute to sustainable certification (Leed, LBC or Well)

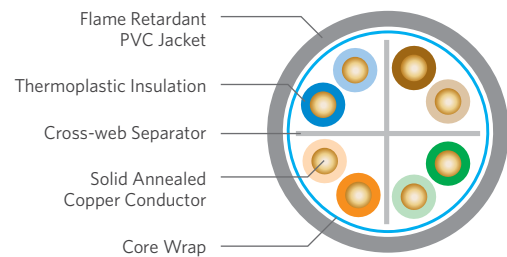

Category 6A 10Gain[®] +

Plenum (CMP)

- OD: 0.265"
- **AXT Headroom: +2dB**
- PoE: IEEE 802.3 bt Type 1 to Type 4
- 90C rated

P/N: 6B-xxx-yB

- xxx = packaging (272 for 1000ft reel and 246 for 1000ft BrakeBox)
- y = color (2 for blue, 4 for white...)

Riser (CMR)

- OD: 0.290"
- **AXT Headroom: +2dB**
- PoE: IEEE 802.3 bt Type 1 to Type 4
- 75C rated

P/N: 6B-xxx-yA


- xxx = packaging (272 for 1000ft reel and 246 for 1000ft BrakeBox)
- y = color (2 for blue, 4 for white...)



Category 6A 10Gain[®] XP Offer



- Cable without a continuous shield to offer margin over Alien Crosstalk (AXT) performance requirements in ANSI/TIA-568-2.D.
- Uniquely designed Isolation Wrap contains discontinuous sections of metallized material, held in place by a polymeric layer
- Technology leader in the market
- Produced in a Zero Waste to Landfill facility in Kansas
- Contribute to sustainable certification (Leed, LBC or Well)

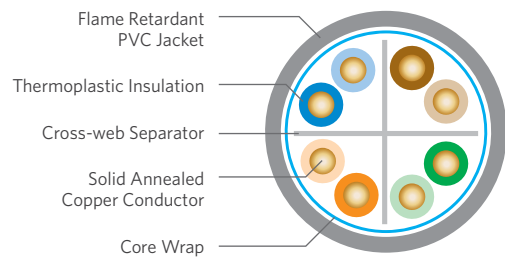

Category 6A 10Gain[®] XP

Plenum (CMP-LP)

- **OD: 0.25"**
- **AXT Headroom: +8dB**
- PoE: IEEE 802.3 bt Type 1 to Type 4
- **HD BaseT certified**
- 90C rated
- UL LP listed

P/N: 6H-xxx-yB

- xxx = packaging (272 for 1000ft reel and 246 for 1000ft BrakeBox)
- y = color (2 for blue, 4 for white...)

Riser (CMR-LP)

- **OD: 0.275"**
- **AXT Headroom: +8dB**
- PoE: IEEE 802.3 bt Type 1 to Type 4
- **HD BaseT certified**
- 75C rated
- UL LP Listed

P/N: 6H-xxx-yA

- xxx = packaging (272 for 1000ft reel and 246 for 1000ft BrakeBox)
- y = color (2 for blue, 4 for white...)

